


## STYLE: AF-5350

The widely used and high-performance gasket sheet from Araflex to apply joints where doubts of leaking exist. Highest quality of Aramid fiber in extra % added with inorganic fiber and superior quality NBR binder. Excellent with natural gas, Steam, new generation refrigerants, chemical, refinery, gas pipe line, food beverage and pharmaceutical industries.

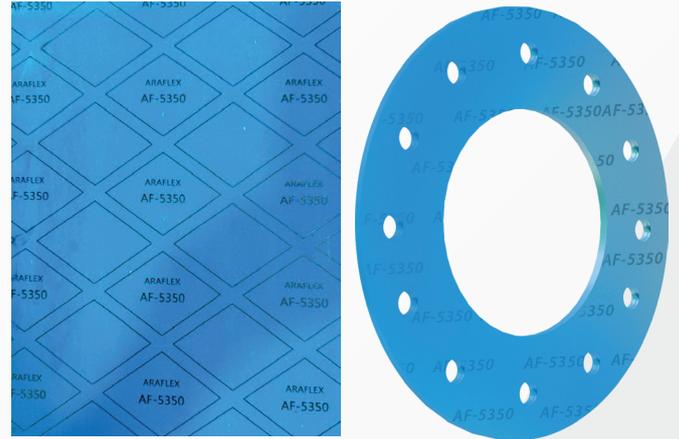


## TYPICAL PROPERTIES

Color	Blue, Branded
Fiber:	Aramid/Inorganic
Binder:	Nitrile (NBR)
Fluid Service:	Steam, oils, hydrocarbons, fuels, water, pharmaceutical, Power and Water Generation services
Application Fields	Petrochemicals, Power Plants, Boilers, Oil Refineries, Desalination Plants, Power Plants, Underground Water lines, High Pressure Pumps & valves Joints, & Beverages.
Technical Conformance to	BS 7531 Grade X
Density:	1.7 g/cm <sup>3</sup>
Tensile Strength ASTM F 152:	2000 psi (13.8 Mpa)
Change in Tensile, ASTM F-152	30% Max
Compressibility ASTM F 36:	8 to 16%
Recovery ASTM F 36:	50%
Temperature	
Range:	-100 to 700°F (-73 to 370°C)
Max. Continuous :	548°F (280°C)
Max. Pressure:	1500 psig (103 bar)
Fluid Resistance-ASTM F146 IRM 903 Oil 5h/300°F (150°C)	

# STYLE: AF-5350

Thickness increase:	0 to 15%
Weight increase:	15%
ASTM Fuel B 5h/70°F (21°C)	
Thickness Increase:	0 to 10%
Weight increase:	10%
<b>Sealability</b>	
ASTM F 37 (Fuel A):	0.01ml/hr.
ASTM F37 (Nitorgen):	0.4 ml/hr.
Dielectric Breakdown ASTM D 149:	11.7kV/mm (297V/mil)
DIN 3535 Gas Permeability:	0.03cc/min
Creep relaxation ASTM F 38:	20%
Flexibility ASTM F1 47:	10x
<b>Gasket Factors of Araflex-AF-5350</b>	

<b>THICKNESS</b>	1/16"	1/8"
<b>m factor</b>	2.7	4.2
<b>y psi (Mpa)</b>	2359 (16)	2930 (20.20)

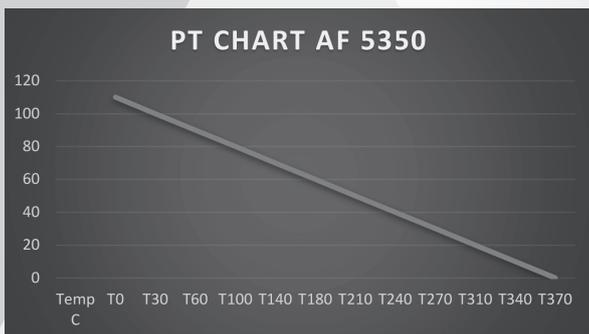

Note: ASTM properties based on 1/16" sheet thickness except ASTM F38, which is based on 1/32" sheet thickness. This is a general guide only and should not be the sole means of accepting or rejecting this material. The data listed here falls within the normal range of product properties but should not be used to establish specification limits nor used alone as the basis of design.

Araflex Warning: Araflex gasket materials should never be recommended when both the temperature and the pressure are at the maximums listed. Properties and applications shown are typical. No application should be undertaken by anyone without independent study and evaluation for suitability. Never use more than one gasket in one flange joint, and never reuse a gasket. Improper use or gasket selection could cause property damage and/or serious personal injury. The data reported is a compilation of field testing, field service reports and/or in-house testing. While the utmost care has gone into publishing the information contained herein, we assume no responsibility for errors. The information and specifications contained in this website are subject to change without notice.

